



# LGD 轴心式滑轨(不生锈)

## Anticorrosive Linear Guide


一个滑块含 4 个滚轮轴承  
One Block with 4 Rolling Bearings




LGD8 / LGD8L




LGD12 / LGD12L  
LGD16 / LGD16L



LGD8 / LGD8L



LGD12 / LGD12L  
LGD16 / LGD16L

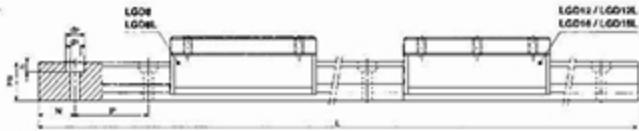

单位(Unit):mm

型号 Model No.	轨 Shaft dmm	组合尺寸 Dimensions of assembly			滑 块 尺 寸 Dimensions of assembly										轨 道 尺 寸 Dimensions of assembly										基本额定动载荷 Basic dynamic load rating C(kgf)	基本额定静载荷 Basic dynamic load rating C0(kgf)	允许静力矩 Allowable static moment To Tx Ty (kg·m)			型号 Model No.
		H	H <sub>1</sub>	W <sub>1</sub>	W	W <sub>4</sub>	H <sub>2</sub>	D	L <sub>1</sub>	B	B <sub>1</sub>	C	C <sub>1</sub>	Slot depth	W <sub>2</sub>	H <sub>3</sub>	d <sub>1</sub>	d <sub>2</sub>	h	P	N	L(max)			To	Tx	Ty			
LGD8	8	30	4	16	60	59	26	9	70	40	10	50	10	m6x8	28	20	5.5	9.5	5.2	50	25	3,000	80	130	3.6	3.0	3.2	LGD8		
LGD8L									100			80													3.6	4.6	5.5	LGD8L		
LGD12	12	40	4	23	82	80	36	12	100	27	14	38	12	m8x12	36	25	6.6	12.6	6.2	50	25	4,000	180	290	5.4	4.0	4.8	LGD12		
LGD12L									140			58													5.4	7.2	8.5	LGD12L		
LGD16	16	50	5	35	120	118	45	14	150	45	15	60	15	m8x16	50	32	9	20	9	80	40	4,000	330	530	13.5	19.8	21.6	LGD16		
LGD16L									190			80													13.5	35.6	38.2	LGD16L		

订货号:

LGD12-B2-R1800C

① ② ③

①型号

②1支滑轨上滑块之个数:

B1:1个 B2:2个 B3:3个.....

③滑轨长度:2400mm

轴心:轴心热处理HRC62±2, 硬镀铬及研磨

Example of identification number

LGD12-B2-R1800C

① ② ③

①Model No

②Number of blades per track roll:

B1:1 Block B2:2 Blocks B3:3Blocks...

③Length of track roll(2400mm)

Shaft:Hardened HRC62 ± 2 ground and chromium plated

